




Tel: 0151 495 5740
Fax: 0151 495 5741
Email: sales@keytrak.co.uk
Web: www.keytrak.co.uk

TS5.224 Size 2-4 Architectural Slimline Overhead Door Closer

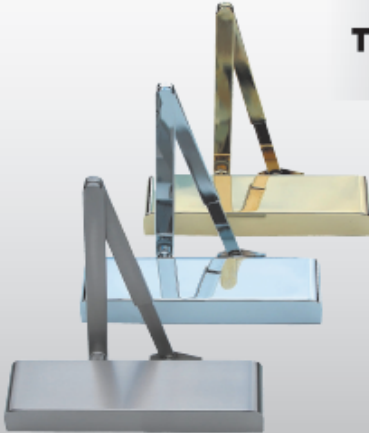

Product Overview:

An efficient, durable and stylish adjustable power overhead door closer. Suitable for most applications particularly those with constant use which require a backcheck function.



Testing & Standards:

- CE marked against EN1154
- Included in successful fire test to EN1634
- Certifire approved - refer to CF689 for scope of approval
- Safe in use
- High corrosion resistance

Specification

Closing Force (Fig 1 & Fig 6)	EN Size	2-4
Door Size (max)	Width (mm)	1100
	Weight (kg)	80
Body Dimensions	Length (mm)	207
	Width (mm)	55
	Depth(mm)	38
Application	Regular Fig. 1	y
	Parallel Arm Fig. 6	y
	Transom Fig. 61	y*
Mechanism	Rack & Pinion	y
Power Shoe Bracket		y
Angle Of Opening		180°
Non Handed		y
Power Adjustment By Spring		n
Power Adjustment By Position		y
Adjustable Sweep Speed		y
Adjustable Latch Speed		y
Adjustable Backcheck		y
Adjustable delayed Action		n
Guarantee	Years	25
Options		
Architave Brackets		y*
Drop Plates		y*
Hold-Open Arm (not suitable for use on fire doors)		y*
Slide Arm & Track		y*
Hollow Door Fixing Pack		y*
Saddle Bracket For Glass Door Installation		y*
Cover Options		
Radius Edge		y
Semi-Radius		y
Full-Radius		y
Square		y
Finish Options		
No Cover		SIL
Cover		SIL, SSS, PSS, PB, RAL, T304, BRONZE

* these options are not covered by the Certifire approval

**Keytrak Lock and Safe Company,
 Unit 1 Heron Business Park,
 Tanhouse Lane, Widnes, WA80SW**